



STATAMAT
BRANDPREVENTIE - BRANDBESTRIJDING - DETECTIE

Finlandstraat 5A (haven 8000C) 9940 Evergem
Tel. 09-2555333 Fax 09-2555339
E-mail info@statamat.be
Web www.statamat.be

MORLEY IAS
FIRE SYSTEMS

by Honeywell



PART VI

AUDIO & VISUAL SIGNALLING DEVICES



STATAMAT

BRANDPREVENTIE - BRANDBESTRIJDING - DETECTIE

Finlandstraat 5A (haven 8000C) 9940 Evergem

Tel. 09-2555333 Fax 09-2555339

E-mail info@statamat.be

Web www.statamat.be

MORLEY IAS
FIRE SYSTEMS

by Honeywell

VI - Audio-Visual Signalling Devices

Conventional Sounders, Strobes & Bases

| REFERENCE | NS Series | UNIT PRICE IN € |
|-----------|--|--------------------|
| NS4/R | 1W STANDARD SOUNDER RED 4 tones, including slow whoop tone - Max. 106dB 12, 24VDC - 12mA, base not included | 26,90 |
| NS4/W | 1W STANDARD SOUNDER WHITE 4 tones, including slow whoop - Max. 106dB 12, 24VDC - 12mA, base not included | 26,90 |
| NX2/R/R | 1W XENON STROBE RED & RED LENS 2W - 24VDC, base not included | 54,75 |
| NX5/R/R | 1W XENON STROBE RED & RED LENS 5W - 24VDC, base not included | 69,50 |
| NXS14/R | 1W COMBINED FULL FEATURE SOUNDER STROBE - 24VDC Red sounder - red clip-on lens. Strobe = 0.6W. Max. 106dB. | 71,50 |
| NBL/R | 1W LOW PROFILE BASE RED - IP44 Low profile unit standing 22mm proud of the mounting surface. Rear and side cable access | 3,90 |
| NBL/W | 1W LOW PROFILE BASE WHITE - IP44 Low profile unit standing 22mm proud of the mounting surface. Rear and side cable access | 3,90 |
| NBD/R | 1W SURFACE BASE RED - IP55 Depth 35mm for easy installation 20 mm knockout inputs | 4,80 |
| NBD/W | 1W SURFACE BASE WHITE - IP55 Depth 35mm for easy installation 20 mm knockout inputs | 4,80 |
| NBS/R | 1W SURFACE BASE WITH SEALING KIT RED - IP66 Depth 35mm for easy installation 20 mm knockout inputs | 8,65 |
| NBS/W | 1W SURFACE BASE WITH SEALING KIT WHITE - IP66 Depth 35mm for easy installation 20 mm knockout inputs | 8,65 |





STATAMAT

BRANDPREVENTIE - BRANDBESTRIJDING - DETECTIE

Finlandstraat 5A (haven 8000C) 9940 Evergem
 Tel. 09-2555333 Fax 09-2555339
 E-mail info@statamat.be
 Web www.statamat.be

MORLEY IAS
 FIRE SYSTEMS

by Honeywell

| | | | |
|-----------------|--|---|--------------|
| NBS4 | 1W STANDARD BASE SOUNDER WHITE 4 tones including Slow Whoop 9 - 33VDC, Max. 96dB, 35mm deep |  | 31,10 |
| NBS14 | 1W FULL FEATURE BASE SOUNDER WHITE (14 TONES). | | 33,10 |
| NBSLID/W | 1W DBS WHITE FRONT FOR NBS4 (LID-Pack of 10) |  | 9,85 |
| NBSLID/R | 1W DBS RED FRONT FOR NBS4 (LID-Pack of 10) | | 9,85 |




| | | |
|-----------|--|--------------------|
| REFERENCE | Addressable Sounders, Strobes & Bases | UNIT PRICE IN € |
|-----------|--|--------------------|

! Base NOT included!



x = enclosure color & y= lens color, please specify!

R = red A = amber
 W= bright white RD = red

| | | | |
|-----------------------|--|---|---------------|
| MI-WSD-x | 1W ADDRESSABLE WALL MOUNT SOUNDER 32 tones incl.SLOW WHOOP 3 volume setting selectable 3,7 mA - 102 db Ø 115 X H 68 or 111 mm following kind of base IP 33 with LPBW & IP65 with WDBx |  | 75,00 |
| MI-WSD-x-I | 1W ADDRESSABLE WALL MOUNT SOUNDER including Isolator | | 88,00 |
| MI-BEAC-RD | 1W ADDRESSABLE WALL MOUNT STROBE RED Red Lens 6 mA Ø 115 X H 39 or 82 mm following kind of base IP 33 with LPBW & IP65 with WDBx |  | 69,00 |
| MI-BEAC-RD-I | 1W ADDRESSABLE WALL MOUNT STROBE RED including Isolator | | 82,50 |
| MI-WSDB-R-RD | 1W ADDRESSABLE WALL MOUNT SOUNDER & STROBE 32 Tones, Red box & Lens 3 volume setting selectable 9,7 mA - 102 db Ø 115 X H 68 or 111 mm following kind of base IP 33 with LPBW & IP65 with WDBx |  | 113,00 |
| MI-WSDB-R-RD-I | 1W ADDRESSABLE WALL MOUNT SOUNDER & STROBE including Isolator | | 126,00 |



STATAMAT

BRANDPREVENTIE - BRANDBESTRIJDING - DETECTIE

Finlandstraat 5A (haven 8000C) 9940 Evergem
Tel. 09-2555333 Fax 09-2555339
E-mail info@statamat.be
Web www.statamat.be

MORLEY IAS
FIRE SYSTEMS

by Honeywell







Compatible with addressable detectors MI series & OPMI series



x = enclosure color & y= lens color, please specify!

W=detector white (ivory) RD= red
PW= bright white CL = clear
A = amber

| | | | |
|------------------------|--|---|---------------|
| MI-IBSD-x | 1W ADDRESSABLE DETECTOR BASE SOUNDER 32 tones incl.SLOW WHOOP 3 volume setting selectable 2,8 mA - 92 db Ø 112 X H 69,2 or 111 mm following kind of base (IP21) |  | 84,00 |
| MI-IBSD-x-I | 1W ADDRESSABLE DETECTOR BASE SOUNDER including Isolator | | 97,00 |
| MI-IBSDB-W-RD | 1W ADDRESSABLE DETECTOR BASE SOUNDER/STROBE 32 Tones, Red Lens 3 volume setting selectable 8,8 mA - 92 db |  | 111,00 |
| MI-IBSDB-W-RD-I | 1W ADDRESSABLE DETECTOR BASE SOUNDER/STROBE including Isolator | | 126,00 |
| LPBW | 1W LOW PROFIL BASE cable entrance only backside in the middle |  | 7,05 |
| | x= enclosure color, please specify! R = red W = bright white D = detector white (ivory) | | |
| DBSPx | 1W PACK OF 5 SHALLOW BASE |  | 15,00 |
| SDBx | 1W DEEP PROFIL BASE surface mounting including the low profile base LPBW |  | 11,20 |
| WDBx | 1W DEEP WATERPROOF BASE RED surface mounting including the low profile base LPBW |  | 13,30 |
| SC072 | 1W PACK OF 5 EARTH CONTINUITY LINKS FOR DEEP AND WATERPROOF MOUNTING KITS | | 18,70 |

**STATAMAT**

BRANDPREVENTIE - BRANDBESTRIJDING - DETECTIE


Finlandstraat 5A (haven 8000C) 9940 Evergem
Tel. 09-2555333 Fax 09-2555339
E-mail info@statamat.be
Web www.statamat.be**MORLEY IAS**
FIRE SYSTEMS

by Honeywell

| REFERENCE | Industrial Sounders & Strobes | | UNIT PRICE IN € |
|-----------|-------------------------------|--|--------------------|
|-----------|-------------------------------|--|--------------------|



This series of sounders includes the SLOW WHOOP tone
Max dB level depends on selected tone setting
See specifications



| | | | |
|---------------|--|--|---------------|
| MS1/R | 1W INDUSTRIAL SOUNDER MAX. 106dB - RED 32 TONES 12/24 Vdc, IP54, VDS approved, dim.: (w)90x(h)90x(d)81 Sound selection via 5 way DIL switch |  | 59,50 |
| Y05D | 8W INDUSTRIAL SOUNDER 24V 110dB 32 TONES 24 Vdc, IP54, VDS approved, dim.: (w)169x(h)134x(d)128 Sound selection via DIL switch |  | 161,50 |
| Y08D | 8W INDUSTRIAL SOUNDER 24V 116dB 32 TONES 12 to 35 Vdc, IP54, VDS approved, dim.: (w)269x(h)216x(d)153 Sound selection via DIL switch |  | 410,00 |
| Y08/SD | 8W INDUSTRIAL SUPER SOUNDER 24V 120dB 32 TONES 12 to 35 Vdc, IP54, VDS approved, dim.: (w)269x(h)216x(d)153 Sound selection via DIL switch |  | 612,00 |

**y= lens color, please specify!**

R = red

A = amber (lead time 8W)

B = blue (lead time 8W)

| | | | |
|----------------|---|---|---------------|
| MS2/R/y | 1W XENON STROBE - 24VDC - 5W - RED/RED LENS 24VDC, IP65, flash rate = 1 per second 360 degree visibility, dim.: (w)90x(h)90x(d)81 |  | 104,00 |
| MS5/R/y | 1W INDUSTRIAL STROBE AND SOUNDER 5 W - 106dB - 32 TONES 24 Vdc, IP54, VDS approved, dim.: (w)90x(h)179x(d)81 Sound selection via 5 way DIL switch - 32 tones Red body, red lens |  | 175,00 |



STATAMAT

BRANDPREVENTIE - BRANDBESTRIJDING - DETECTIE

Finlandstraat 5A (haven 8000C) 9940 Evergem
Tel. 09-2555333 Fax 09-2555339
E-mail info@statamat.be
Web www.statamat.be



STATAMAT

BRANDPREVENTIE - BRANDBESTRIJDING - DETECTIE

Finlandstraat 5A (haven 8000C) 9940 Evergem
Tel. 09-2555333 Fax 09-2555339
E-mail info@statamat.be
Web www.statamat.be

MORLEY IAS
FIRE SYSTEMS

by Honeywell



PART VII

MISCELLANEOUS & ACCESSORIES



STATAMAT

BRANDPREVENTIE - BRANDBESTRIJDING - DETECTIE

Finlandstraat 5A (haven 8000C) 9940 Evergem
Tel. 09-2555333 Fax 09-2555339
E-mail info@statamat.be
Web www.statamat.be

MORLEY IAS
FIRE SYSTEMS

by Honeywell

VII - Miscellaneous & Accessories

Intrinsically Safe Devices



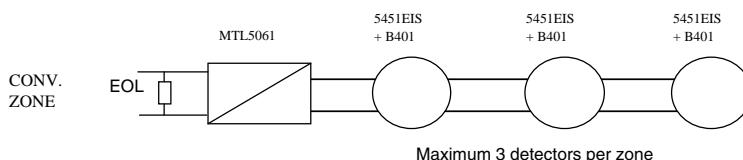
For Intrinsically Safe & Eex-proof Flame Detectors



SEE CHAPTER IV : Conventional detect. & devices

REFERENCE **Intrinsically Safe Conventional Detectors** UNIT PRICE IN €

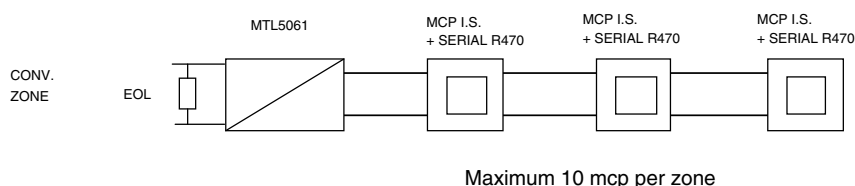





!! NO REMOTE INDICATOR OPTION AVAILABLE!!



| | | | |
|----------------|---|---|---------------|
| 5451EIS | 1W INTRINSICALLY SAFE CONVENTIONAL HEAT DETECTOR EEx ia IIB T5 - IIB ATEX APPROVED |  | 81,00 |
| MTL5061 | 4W 2 CHANNEL GALVANIC ISOLATOR FOR INTRINSICALLY SAFE DETECTORS |  | 580,00 |

REFERENCE **Intrinsically Safe Manual Call Points** UNIT PRICE IN €



| | | | |
|--------------------------|---|---|---------------|
| MPC3A-R000FG-01IS | 6W INTRINSICALLY SAFE MANUAL CALL POINT Break Glass included - backbox not included Changeover contact, EN54 Markings Use suitable Zener barriers. Certification : Ex II 1 G - EEx ia II T4 |  | 37,00 |
| MPC3A-R000FF-01IS | 6W INTRINSICALLY SAFE MANUAL CALL POINT Flexible element included - backbox not included Changeover contact, EN54 Markings Ex II 1 G - EEx ia II T4 |  | 38,00 |
| WCP3A-R000SG-01IS | 6W WATERPROOF INTRINS. SAFE MANUAL CALL POINT Break Glass included - backbox included Changeover contact, EN54 Markings Ex II 1 G - EEx ia II T4 |  | 190,00 |





STATAMAT

BRANDPREVENTIE - BRANDBESTRIJDING - DETECTIE

Finlandstraat 5A (haven 8000C) 9940 Evergem
 Tel. 09-2555333 Fax 09-2555339
 E-mail info@statamat.be
 Web www.statamat.be


MORLEY IAS
 FIRE SYSTEMS

by Honeywell




| | | | |
|-------------------------|---|---|---------------|
| WCP3A-R00SF-01IS | 6W WATERPROOF INTRINS. SAFE MANUAL CALL POINT Flexible element included - backbox included Changeover contact, EN54 Markings Ex II 1 G - EEx ia II T4 |  | 191,00 |
| MTL5061 | 4W GALVANIC ISOLATOR FOR INTRINSICALLY SAFE DETECTORS |  | 580,00 |

| | | | |
|-----------|------------------------------------|--|--------------------|
| REFERENCE | Intrinsically Safe Sounders | | UNIT PRICE IN € |
|-----------|------------------------------------|--|--------------------|

For use with galvanic isolator in hazardous areas.



!! Max 1 sounder by isolator !!

| | | | |
|-----------------|---|---|---------------|
| MS1R IS | 8W MULTI-SOUNDER INTRINSICALLY SAFE 100dB 32 TONES Eex.ia IIC.T4&T6- BASEEFA Ex87B2163 & ATEX certified. Dimensions : (w)90x(h)180x(d)81 |  | 425,00 |
| Y05/R/IS | 8W MULTI-SOUNDER INTRINSICALLY SAFE 105dB 32 TONES ATEX & BASEEFA approved. Dimensions : (w)169x(h)134x(d)128 |  | 485,00 |
| ▼▼ NEW | | | |
| MTL5525 | 4W GALVANIC ISOLATOR FOR IS SOUNDERS |  | 300,00 |



STATAMAT


BRANDPREVENTIE - BRANDBESTRIJDING - DETECTIE




Finlandstraat 5A (haven 8000C) 9940 Evergem
 Tel. 09-2555333 Fax 09-2555339
 E-mail info@statamat.be
 Web www.statamat.be

MORLEY IAS
 FIRE SYSTEMS

by Honeywell

Explosion Proof Devices

| REFERENCE | Explosion Proof Manual Call Points | | UNIT PRICE IN € |
|------------------------|------------------------------------|--|---|
| | | | |
| BGEB4B6B 1DSN6R | 8w | EXPLOSION PROOF IP67 MANUAL CALL POINT RED |  570,00 |
| BGE4B6B1 DSA6R | 8w | EXPLOSION PROOF IP67 MANUAL CALL POINT RED with LED, BASEEFA & ATEX certified | 755,00 |

| REFERENCE | Explosion Proof Sounders & Strobes | | UNIT PRICE IN € |
|------------------|------------------------------------|---|--|
| | | | |
| Y06/R/24V | 8w | EXPLOSION PROOF IP66 SOUNDER 24V - 350mA (Specify type on order : IIB or IIB+H2) 110dB 32 Tones ATEX certified |  1260,00 |
| YL6/R/24V | 8w | EXPLOSION PROOF IP66 SOUNDER-STROBE 24V - 570mA (Specify type on order : IIB or IIB+H2) 110dB 32 Tones ATEX certified |  2180,00 |
| V6/R/24V | 8w | EXPLOSION PROOF IP66 STROBE 24V - 220mA (Specify type on order : IIB or IIB+H2) ATEX certified |  1330,00 |




**STATAMAT**

BRANDPREVENTIE - BRANDBESTRIJDING - DETECTIE

Finlandstraat 5A (haven 8000C) 9940 Evergem
Tel. 09-2555333 Fax 09-2555339
E-mail info@statamat.be
Web www.statamat.be**MORLEY IAS**
FIRE SYSTEMS

by Honeywell

Power Supplies, Chargers & Batteries

| REFERENCE | Power Supplies & Chargers | | UNIT PRICE IN € |
|------------------|---------------------------|--|---|
| FA24-2,5A | 1w | POWER SUPPLY 24VDC - 2,5A WITHOUT CHARGER AND CABINET Dimensions (wxhxd): 166 x 38 x 100 mm. Input Voltage 230V ac +/- 10%, 50/60Hz |  107,50 |
| MPS25 | 1w | MORLEY-IAS POWER SUPPLY UNIT 24VDC - 2,5A Two 24Vdc outputs, max. 1A on each output 600mA for battery charger Earth fault monitoring and Fault relay Dimensions: 380 (w) x 410 (h) x 97 (d) |  306,00 |
| MPS50 | 1w | MORLEY-IAS POWER SUPPLY UNIT 24VDC - 5A Two 24Vdc outputs, max. 2A on each output 600mA for battery charger Earth fault monitoring and Fault relay Dimensions: 380 (w) x 410 (h) x 97 (d) |  408,00 |

| REFERENCE | AES Series | | UNIT PRICE IN € |
|-----------|------------|--|--------------------|
|-----------|------------|--|--------------------|

▼ ▼ NEW

The AES series is designed to supply electrical power for Fire detection systems approved to EN54-4 A2.

The AES series is protected against lightning strikes and short circuits.

A dynamic regulation stabilizes the output voltage and keeps it within the preset tolerance range.

Elaborate filters eliminate all interferences and reduce the residual ripple from the 230 Vac mains.

The status of the power device is locally displayed by leds and remotely by means of dry contacts.

To preserve the capacity of batteries, their discharge is limited in conjunction with automatic disconnection of the user circuit.

NF Approved EN54-4 A2

The indicated power includes the battery charger consumption.
Therefore , the total available power is 5% less. (Except AES 28V 8A C85 SB)

C24 BOX

AES Power Supply integrated in a wall mounted box C24:
Dimension: 322(w) x 248(h) x 126(d)
Can hold up to 2 batteries 12Ah-12V



| | | | |
|------------------------------|----|-----------------------------------|---------------|
| AES 24V 3A C24 SB | 3w | POWER SUPPLY UNIT 24V - 3A | 625,00 |
|------------------------------|----|-----------------------------------|---------------|



STATAMAT

BRANDPREVENTIE - BRANDBESTRIJDING - DETECTIE

Finlandstraat 5A (haven 8000C) 9940 Evergem
 Tel. 09-2555333 Fax 09-2555339
 E-mail info@statamat.be
 Web www.statamat.be

MORLEY IAS
 FIRE SYSTEMS

by Honeywell

C38 BOX

AES Power Supply integrated in a wall mounted box C38:
 Dimension: 289(w) x 350(h) x 189(d)
 Can hold up to 2 batteries 24Ah-12V



| | | |
|------------------------------|--------------------------------------|----------------|
| AES 24V 3A C38 SB | 3W POWER SUPPLY UNIT 24V - 3A | 675,00 |
| AES 24V 4A C38 SB | 3W POWER SUPPLY UNIT 24V - 4A | 815,00 |
| AES 24V 6A C38 SB | 3W POWER SUPPLY UNIT 24V - 6A | 1085,00 |

C85 BOX

AES Power Supply integrated in a wall mounted box C85:
 Dimension: 408(w) x 408(h) x 224(d)
 Can hold up to 2 batteries 38Ah-12V



| | | |
|------------------------------|--------------------------------------|----------------|
| AES 24V 8A C85 SB | 3W POWER SUPPLY UNIT 24V - 8A | 1360,00 |
|------------------------------|--------------------------------------|----------------|

| | | |
|-----------|------------------|--------------------|
| REFERENCE | Batteries | UNIT PRICE IN € |
|-----------|------------------|--------------------|



| | | |
|------------------|---|---------------|
| RB012AHB | 2W 1,2 Ah 12V SEALED LEAD ACID BATTERY Dimensions 97 x 48 x 54mm - VDS Approved (G107019) | 11,60 |
| RB021AHB | 2W 2,1 Ah 12V SEALED LEAD ACID BATTERY Dimensions 178 x 34 x 60mm - VDS Approved (G107020) | 17,45 |
| RB040AHB | 2W 4.5 Ah 12V SEALED LEAD ACID BATTERY Dimensions 90 x 70 x 102mm | 17,45 |
| RB070AHB | 1W 7.2 Ah 12V SEALED LEAD ACID BATTERY Dimensions 151 x 65 x 94mm - VDS Approved (G107021) | 20,50 |
| RB120AHB | 1W 12 Ah 12V SEALED LEAD ACID BATTERY Dimensions 151 x 98 x 94mm - VDS Approved (G107023) | 43,10 |
| RB180AHB | 1W 17 Ah 12V SEALED LEAD ACID BATTERY Dimensions 181 x 76 x 167mm - VDS Approved (G107024) | 56,50 |
| RB260AHB | 1W 24 Ah 12V SEALED LEAD ACID BATTERY Dimensions 166 x 175 x 125mm - VDS Approved (G107025) | 85,50 |
| RB400AHB | 2W 38 Ah 12V SEALED LEAD ACID BATTERY Dimensions 197 x 165 x 170mm - VDS Approved (G107026) | 137,10 |
| RB650AHB | 2W 65 Ah 12V SEALED LEAD ACID BATTERY Dimensions 350 x 166 x 174mm - VDS Approved (G107027) | 216,15 |
| RB1300AHB | 2W 130 Ah 12V SEALED LEAD ACID BATTERY | 365,00 |



STATAMAT



BRANDPREVENTIE - BRANDBESTRIJDING - DETECTIE






Finlandstraat 5A (haven 8000C) 9940 Evergem
Tel. 09-2555333 Fax 09-2555339
E-mail info@statamat.be
Web www.statamat.be

MORLEY IAS
FIRE SYSTEMS

by Honeywell

Smoke and Heat Evacuation System

| REFERENCE | MI-SAHEP-4 Control Panels | UNIT PRICE IN € |
|----------------------|--|---|
| MI-SAHEP-4 | 1W SMOKE AND HEAT EVACUATION PANEL FOR 4 MOTORS 2 X 2,1Ah Batteries included |  625,00 |
| MI-SAHEP-4.EM | 1W SMOKE EVACUATION PANEL FOR 4 ELECTRO MAGNETS 2 X 2,1Ah Batteries included |  625,00 |

| REFERENCE | MI-SAHEP-4 Peripheral Devices | UNIT PRICE IN € | |
|--------------------|---|---|---------------|
| ▼▼ NEW | | | |
| WRD1 | 1W WIND & RAIN DETECTOR CONTROL UNIT Surface Mount Box included |  220,00 | |
| ▼▼ NEW | | | |
| RD | 1W RAIN DETECTOR |  130,00 | |
| ▼▼ NEW | | | |
| WD | 1W WIND DETECTOR |  135,00 | |
| ▼▼ NEW | | | |
| DS24VDC350 | 1W MOTOR 24VDC 650N 35 CM IP65 |  275,00 | |
| DS24VDC550 | 1W MOTOR 24VDC 650N 55 CM IP65 | | 290,00 |
| DS24VDC750 | 1W MOTOR 24VDC 650N 75 CM IP65 | | 300,00 |
| DS24VDC950 | 1W MOTOR 24VDC 200N 95 CM IP65 | | 400,00 |
| ▼▼ NEW | | | |
| DUO24VDC550 | 1W MOTOR 24VDC 600N 55 CM IP65 FOR DUAL ARMS |  315,00 | |
| DUO24VDC750 | 1W MOTOR 24VDC 600N 75 CM IP65 FOR DUAL ARMS | | 380,00 |
| ▼▼ NEW | | | |
| DUODR550 | 1W SLAVE ARM FOR DUO 55CM |  125,00 | |
| DUODR750 | 1W SLAVE ARM FOR DUO 75CM | | 145,00 |
| TT130 | 1W ASSEMBLING KITFOR DUO 55CM |  50,00 | |
| TT160 | 1W ASSEMBLING KITFOR DUO 75CM | | 55,00 |



STATAMAT

BRANDPREVENTIE - BRANDBESTRIJDING - DETECTIE

Finlandstraat 5A (haven 8000C) 9940 Evergem

Tel. 09-2555333 Fax 09-2555339

E-mail info@statamat.be

Web www.statamat.be

MORLEY IAS
FIRE SYSTEMS

by Honeywell

Door Magnets

| REFERENCE | Door Magnets | UNIT PRICE IN € |
|---------------|---|--------------------|
| 1330NEML-D 1W | <p>ELECTRO MAGNETIC LOCK Equipped with cushioned counter plates With protection diode against current spikes Nickel plated steel body; base in ABS; connection by wires 24VDC/65mA - retaining strength 50Kg</p> | 45,90 |
| 1340NEML-D 1W | <p>ELECTRO MAGNETIC LOCK Equipped with cushioned counter plates With protection diode against current spikes Nickel plated steel body; base in ABS; Wire terminals 24VDC/100mA - retaining strength 100 Kg</p> | 58,20 |
| 1335NEML 1W | <p>ELECTRO MAGNETIC LOCK Equipped with cushioned counter plates With release button, Nickel plated steel body & base in ABS Connection to terminals - Unlock button 24VDC/65mA - retaining strength 50Kg</p> | 45,90 |
| 1345NEML 1W | <p>ELECTRO MAGNETIC LOCK Equipped with cushioned counter plates With release button and protection diode against current spikes. Nickel plated steel body; base in ABS Connection to terminals - Unlock button 24VDC/100mA - retaining strength 100Kg</p> | 67,50 |
| 1350NEML 1W | <p>ELECTRO MAGNETIC LOCK Equipped with cushioned counter plates Aluminium container - Nickel plated steel body Connection to terminals. Internal electronic circuit allows halving the retaining strength. Unlock button Protection diode against current spikes Release button on the container side, Dimensions 95x95x40mm 24VDC/34-65mA - retaining strength 25-50 Kg</p> | 73,30 |
| 1360NEML 1W | <p>ELECTRO MAGNETIC LOCK Equipped with cushioned counter plates Aluminium container - Nickel plated steel body Connection to terminals. Internal electronic circuit allows halving the retaining strength - Protection diode against current spikes Release button on the container side, Dimensions 95x95x40mm 24VDC/40-100mA - Retaining strength 50-100 Kg</p> | 81,60 |



STATAMAT

BRANDPREVENTIE - BRANDBESTRIJDING - DETECTIE

Finlandstraat 5A (haven 8000C) 9940 Evergem
Tel. 09-2555333 Fax 09-2555339
E-mail info@statamat.be
Web www.statamat.be

MORLEY IAS
FIRE SYSTEMS

by Honeywell

| | | | |
|------------------|---|---|---------------|
| 1365NEML | 1W ELECTRO MAGNETIC LOCK Equipped with cushioned counter plates Doors are kept open, without current's consumption. A voltage pulse on the electromagnet creates an opposite magnetic field, that separates the two parts allowing the spring to close the door. Pulse voltage 24VDC/250mA Dimensions 60x60x30 mm - Retaining strength 25 Kg |  | 86,75 |
| 1369NEML | 1W ELECTRO MAGNETIC LOCK - FLOOR FITTING Equipped with cushioned counter plates Supplied with release push-button. Wire terminals - 24VDC/65mA - Retaining strength 50 Kg |  | 79,60 |
| 1315NEML | 1W ELECTRO MAGNETIC LOCK Supplied with easily unlocking push-button. Black thermoplastic material body. Cable input on four sides. Nickel plated steel core. With protection diode against current spikes. 24VDC/40mA - Retaining strength 50 Kg |  | 56,10 |
| 1370/15 D | 1W MAGNETIC DOOR RELEASE UNIT 50KG The fixing bracket allows installation on floor, ceiling and wall. Nickel plated steel coil; steel bracket; allodium support Wire terminals - release button - 15 cm bracket With protection diode against current spikes. 24VDC/65mA-Retaining strength 50 Kg |  | 93,80 |
| 1370/30 D | 1W MAGNETIC DOOR RELEASE UNIT 50KG Same as item 1370/15 D but with a 30cm bracket. |  | 103,00 |
| 1380/15 D | 1W MAGNETIC DOOR RELEASE UNIT 100KG Same as item 1370/15 D but with a retaining strength of 100kg and 100mA power consumption. |  | 104,00 |
| 1380/30 D | 1W MAGNETIC DOOR RELEASE UNIT 100KG Same as item 1380/15 D but with a 30cm bracket. |  | 110,20 |

**STATAMAT**

BRANDPREVENTIE - BRANDBESTRIJDING - DETECTIE

Finlandstraat 5A (haven 8000C) 9940 Evergem

Tel. 09-2555333 Fax 09-2555339

E-mail info@statamat.be

Web www.statamat.be

MORLEY IAS
FIRE SYSTEMS

by Honeywell

Fire Alarm Cable



Prices of wires are in euro per reels of 100m and 500m.

Reels of 100m are in stock in Spain.

Reels of 500m in 1,5 are in stock in our Warehouse

Other reel sizes on demand.

(Price and delivery delay on request)

REFERENCE Halogen Free Sheathed & Shielded Cables UNIT PRICE IN €

*Polyester/aluminium shield and 0,5mm² tinned copper drain.**Recommended for NOTIFIER analogue loop installation.**Flame non spreader, halogen free, low level of smoke emission and aggressivity.***Price per reels of 500 m**

| | | | |
|--------------|----|--|----------------|
| 2x1,5-LH-500 | 1W | TWISTED-SHIELED CABLE 2 WIRES 1,5MM², ORANGE | 635,00 |
| 2x2,5-LH-500 | 5W | TWISTED-SHIELED CABLE 2 WIRES 2,5MM², ORANGE | 1045,00 |

REFERENCE Halogen Free Sheathed & Shielded Fire Resistant Cables UNIT PRICE IN €

*Polyester/aluminium shield and 0,5mm² tinned copper drain.**Recommended for NOTIFIER analogue loop installation.**Fire resistant, halogen free, low level of smoke emission and aggressivity.***Price per reels of 500 m**

| | | | |
|---------------|----|--|----------------|
| 2x1,5-LHR-500 | 1W | TWISTED-SHIELED FIRE RESISTANT CABLE 2 WIRES 1,5MM², RED | 1260,00 |
| 2x2,5-LHR-500 | 5W | TWISTED-SHIELED FIRE RESISTANT CABLE 2 WIRES 2,5MM², RED | 1915,00 |

REFERENCE Special Wires for Communications UNIT PRICE IN €

Polyester/aluminium shield and 0,5mm² tinned copper drain.

Recommended for RS485 connections.

Impedance: 120ohms. Flame non spreader.



| | | | |
|------------|----|--|---------------|
| CSR485-100 | 5W | TWISTED-SHIELED CABLE 2 WIRES 1MM², RED -100M | 135,00 |
| CSR485-500 | 5W | TWISTED-SHIELED CABLE 2 WIRES 1MM², RED - 500M | 650,00 |

**STATAMAT**

BRANDPREVENTIE - BRANDBESTRIJDING - DETECTIE

Finlandstraat 5A (haven 8000C) 9940 Evergem

Tel. 09-2555333 Fax 09-2555339









E-mail info@statamat.be

Web www.statamat.be

MORLEY IAS
FIRE SYSTEMS

by Honeywell

Accessories

| REFERENCE | Detector Accessories | | UNIT PRICE IN € |
|---|---|--|--------------------|
|  | xx= color type WH = bright white IV = ivory NOT available in black! | | |
| RMK400-xx | 1W RECESS MOUNTING KIT For suspended and drywall ceilings. For use with standard bases B401/B501. (Not compatible with ECO1000) |  | 9,30 |
| SMK400-xx | 1W SURFACE MOUNTING KIT Provides for entry of surface wiring conduit. For use with standard bases B401/B501. (Not compatible with ECO1000) |  | 7,40 |
| WB1-xx | 1W WET BASE SHROUD Adapter base enclosure for humid environments. For use with standard bases B401/B501. Three mounting options are possible: surface mounting, cable mounting and pendant mounting. |  | 22,35 |
| ▼▼ NEW | IBS-LIDy | 4W BASE COVER FOR B501, B501AP, B401 & ABS BASE SOUNDERS PACK OF 10 y= color : W = bright white, DW = detector white (ivory), please specify!! | 70,00 |
| IRK-2E | 1W REMOTE INDICATOR LED Surface mounted with the supplied mounting box. Led's will not blink in normal mode on addressable systems ! |  | 12,75 |
| IRK-E-SI | 1W REMOTE INDICATOR LED Surface mounted with the supplied mounting box. Led's will not blink in normal mode on addressable systems ! |  | 13,85 |
| ▼▼ NEW | IRK-W-xxx | 1W REMOTE INDICATOR IP55 Surface mounted | 75,00 |
|  | xxx= voltage 1224 = 12 tot 24Vdc - Addressable systems (replaces IRK-W-560) 624 = 6 tot 24Vdc - Conventional systems (replaces IRK-W-220) |  | |



STATAMAT

BRANDPREVENTIE - BRANDBESTRIJDING - DETECTIE

Finlandstraat 5A (haven 8000C) 9940 Evergem
Tel. 09-2555333 Fax 09-2555339
E-mail info@statamat.be
Web www.statamat.be

MORLEY IAS
FIRE SYSTEMS

by Honeywell

| REFERENCE | MCP Accessories | UNIT PRICE IN € |
|---------------|--|--------------------|
| PS200 | 1W TRANSPARENT PROTECTIVE HINGED COVER | 4,23 |
| KL1 X 5 | 1W PACK OF 5 EARTH CONTINUITY LINKS | 4,80 |
| ▼▼ NEW | | |
| BZR2 | 1W RED BEZEL FOR FLUSH INSTALLATION | 3,75 |

| REFERENCE | Foil of Labels for Call Points & Switches | UNIT PRICE IN € |
|-----------|---|--------------------|
|-----------|---|--------------------|



Each foil contains 48 labels

▼▼ NEW

| | | | |
|-----------------|--|---|-------|
| MCP-LABEL F 007 | 1W FOIL OF 'PLAIN RED' LABELS |  | 52,50 |
| MCP-LABEL F 010 | 1W FOIL OF 'BRAND FEU' LABELS (black on red) |  | 52,50 |
| MCP-LABEL F 028 | 1W FOIL OF 'ALARME INCENDIE' LABELS (black on red) |  | 52,50 |
| MCP-LABEL F 056 | 1W FOIL OF 'BRAND FEU' LABELS (black on yellow) |  | 52,50 |
| MCP-LABEL F 081 | 1W FOIL OF 'FEU' LABELS (black on yellow) |  | 52,50 |
| MCP-LABEL F 082 | 1W FOIL OF 'BLUSKNOP' LABELS (black on yellow) |  | 52,50 |
| MCP-LABEL F 141 | 1W FOIL OF 'BRAND' LABELS (black on red) |  | 52,50 |
| MCP-LABEL F 103 | 1W FOIL OF 'GASBLUSSING' LABELS (black on yellow) |  | 52,50 |
| MCP-LABEL F 108 | 1W FOIL OF 'ALARME EVACUATION' LABELS (white on red) |  | 52,50 |
| MCP-LABEL F 120 | 1W FOIL OF 'BRAND ALARM' LABELS (black on red) |  | 52,50 |
| MCP-LABEL F 138 | 1W FOIL OF 'ALERTE INCENDIE' LABELS (black on red) |  | 52,50 |
| MCP-LABEL F 141 | 1W FOIL OF 'BRAND' LABELS (black on yellow) |  | 52,50 |
| MCP-LABEL F 217 | 1W FOIL OF 'EXTINCTION' LABELS (black on yellow) |  | 52,50 |
| MCP-LABEL F 218 | 1W FOIL OF 'RUNNING MAN' LABELS (white on green) |  | 52,50 |
| MCP-LABEL F 220 | 1W FOIL OF 'BIJ NOOD DEUR OPEN' LABELS (white on blue) |  | 52,50 |
| MCP-LABEL F 222 | 1W FOIL OF 'EN54 BURNING HOUSE' LABELS (white on red) |  | 52,50 |
| MCP-LABEL F 228 | 1W FOIL OF 'DEUR ONGRENDELING' LABELS (white on blue) |  | 52,50 |
| MCP-LABEL F 235 | 1W FOIL OF 'ALERTE WAARSCHUWING' LABELS (black on red) |  | 52,50 |
| MCP-LABEL F 244 | 1W FOIL OF 'UITSTEL BLUSSING' LABELS (white on blue) |  | 52,50 |




STATAMAT

BRANDPREVENTIE - BRANDBESTRIJDING - DETECTIE

Finlandstraat 5A (haven 8000C) 9940 Evergem
Tel. 09-2555333 Fax 09-2555339
E-mail info@statamat.be
Web www.statamat.be

MORLEY IAS
FIRE SYSTEMS

by Honeywell

| REFERENCE | | Duct Detector Accessories | UNIT PRICE IN € |
|----------------|----|--|--------------------|
| ST-1.5 | 1W | INLET SAMPLING TUBE (LENGTH=457 MM)  | 9,70 |
| ST-3 | 1W | INLET SAMPLING TUBE (LENGTH=916 MM)  | 12,25 |
| ST-5 | 1W | INLET SAMPLING TUBE (LENGTH=1520 MM)  | 16,85 |
| ST-10 | 1W | INLET SAMPLING TUBE (LENGTH=3255 MM)  | 30,50 |
| REFERENCE | | Beam Detector Accessories | UNIT PRICE IN € |
| BEAM-LRK | 1W | LONG-RANGE REFLECTOR (75M-100M)  | 235,00 |
| BEAM-SMK | 1W | SURFACE MOUNTING BOX Absolutly needed when using of the mounting Bracket kit  | 29,60 |
| BEAM-MMK | 1W | MOUNTING BRACKET - SWIVEL TYPE  | 165,00 |
| BEAM-HK | 1W | HEATER KIT FOR 6500R To avoid condensation problems when used in non heated rooms.  | 126,50 |
| BEAM-HKR | 1W | HEATER KIT FOR REFLECTOR To avoid condensation problems when used in non heated rooms.  | 272,50 |
| ▼ ▼ NEW | | | |
| 6500-RTS-KEY | 1W | REMOTE TEST KEY SWITCH | 103,00 |



STATAMAT








BRANDPREVENTIE - BRANDBESTRIJDING - DETECTIE



Finlandstraat 5A (haven 8000C) 9940 Evergem
Tel. 09-2555333 Fax 09-2555339
E-mail info@statamat.be
Web www.statamat.be

MORLEY IAS
FIRE SYSTEMS

by Honeywell

PROTECTIVE ACCESSORIES

| REFERENCE | Steel Protective Covers for Detectors | | UNIT PRICE IN € |
|-----------|---|--|--|
| | <p><i>Steel web stoppers are for areas where abuse to smoke detectors, emergency lighting and so on, is severe. Constructed from plastic coated galvanised steel rod the cages can cope with the severest of abuse from vandalism or accidental damage. Installation and service is very easy with models for flush and surface mounting.</i></p> | | |
| STI 9601 | 1W | LOW PROFILE, FLUSH MOUNTING 70mm x 210mm |  51,00 |
| STI 9602 | 1W | LOW PROFILE, SURFACE MOUNTING 108mm x 210mm |  56,00 |
| STI 9604 | 1W | LOW PROFILE, FLUSH MOUNTING 80mm x 175mm |  51,00 |
| STI 9605 | 1W | LOW PROFILE, SURFACE MOUNTING 115mm x 175mm |  56,00 |
| STI 9606 | 1W | LOW PROFILE, FLUSH MOUNTING 95mm x 175mm |  51,00 |
| STI 9609 | 1W | HIGH PROFILE, FLUSH MOUNTING 114mm x 210mm |  51,00 |
| STI 9610 | 1W | HIGH PROFILE, SURFACE MOUNTING 145mm x 210mm |  56,00 |

| REFERENCE | Protective Cover for MCP | | UNIT PRICE IN € |
|-----------|--|--|--|
| | <p> n = label language N = Dutch F = French D = German E = English I = Italian</p> | | |
| STI 6530n | 2W | STOPPER FLUSH MOUNTED WITHOUT SOUNDER |  64,00 |
| STI 6531n | 2W | STOPPER SURFACE MOUNTED WITHOUT SOUNDER | 85,00 |
| STI 6532n | 2W | STOPPER FLUSH MOUNTED WITH SOUNDER | 137,00 |
| STI 6533n | 2W | STOPPER SURFACE MOUNTED WITH SOUNDER | 158,00 |
| STI 6534n | 2W | WEATHER STOPPER FLUSH MOUNTED WITHOUT SOUNDER | 79,00 |
| STI 6535n | 2W | WEATHER STOPPER SURFACE MOUNTED WITHOUT SOUNDER | 99,00 |

For Green, Blue or Yellow add /G, /B, /Y



STATAMAT

BRANDPREVENTIE - BRANDBESTRIJDING - DETECTIE

Finlandstraat 5A (haven 8000C) 9940 Evergem
Tel. 09-2555333 Fax 09-2555339
E-mail info@statamat.be
Web www.statamat.be

MORLEY IAS
FIRE SYSTEMS

by Honeywell

| OPTIONS : EXTRA COST | | | |
|-----------------------------|----|---|-------|
| /BS | 2W | SECURITY BREAK SEAL | 5,60 |
| /L | 2W | FRANGIBLE LOCK | 6,60 |
| CL | 2W | SPECIAL CUSTOM LABEL | 5,10 |
| DC1224 | 2W | ALLOWS CONNECTION OF 12 OR 24VDC SUPPLY | 15,70 |

For break seal add /BS. For lock add /L.

Ex : STI6533/G/BS = green stopper surface with sounder and break seal.

SPARE PARTS

| | | | |
|--------|----|---|-------|
| STI/BS | 2W | SPARE SECURITY BREAK SEALS (pack of 10) | 15,20 |
| F021 | 2W | SPARE TAMPER KEYS | 4,10 |

| REFERENCE | Steel Protective Covers for Beam Detectors | | UNIT PRICE IN € |
|-----------|--|--|--------------------|
| STI 9624 | 1W | DETECTOR GUARD H 225mm x W 140mm x D 120mm | 56,00 |
| STI 9625 | 1W | BEAM DETECTOR GUARD FOR 6424E Includes heavy duty fixing kit Dimensions: (w) 200 x (h)260 x (d)321mm | 117,00 |
| STI 9706 | 1W | BEAM DETECTOR GUARD FOR 6500/ LPB700 Dimensions: (w) 237 x (h)275 x (d)120mm | 76,00 |
| STI 9707 | 1W | SURFACE MOUNTED BEAM DETECTOR GUARD FOR 6500/ LPB700. Dimensions: (w)244 x (h)280 x (d)140mm | 81,00 |



| REFERENCE | Steel Protective Covers for Audio & Visual Devices | | UNIT PRICE IN € |
|-----------|--|--|--------------------|
| STI 9621 | 2W | PROTECTIVE COVER FOR NS/NX SERIES AUDIO & VISUAL DEVICES | 56,00 |
| STI 9617 | 2W | PROTECTIVE COVER FOR ADDRESSABLE AUDIO & VISUAL DEVICES | 56,00 |

| REFERENCE | Steel Protective Covers for Signalling Panels | | UNIT PRICE IN € |
|-----------|---|--|--------------------|
| STI 9640 | 2W | EXIT LIGHT GUARD Basket H 270mm x W 350mm x D 65mm | 78,50 |
| STI 9641 | 2W | EXIT LIGHT GUARD Basket H 270mm x W 380mm x D 100mm | 91,00 |
| STI 9645 | 2W | EXIT LIGHT GUARD Basket H 350mm x W 550mm x D 150mm | 132,00 |
| STI 9649 | 2W | EXIT LIGHT GUARD Basket H 254mm x W 558mm x D 241mm | 172,00 |





STATAMAT

BRANDPREVENTIE - BRANDBESTRIJDING - DETECTIE

Finlandstraat 5A (haven 8000C) 9940 Evergem
Tel. 09-2555333 Fax 09-2555339
E-mail info@statamat.be
Web www.statamat.be

MORLEY IAS
FIRE SYSTEMS

by Honeywell

| REFERENCE | Surge Protection | UNIT PRICE IN € |
|---------------------------|--|--------------------|
| | <p><i>All modules are modular and easy to fit on standard DIN rails. These kind of modules can avoid big damage to the fire panel and auxiliary equipment in case of a lightning strike.</i></p> | |
| ▼▼ NEW ZB24544 | 1W SURGE PROTECTION MODULE 24V FOR LOOP | 155,00 |
| ▼▼ NEW ZB24518 | 1W SURGE PROTECTION MODULE FOR RS485 INTERFACE | 140,00 |
| ▼▼ NEW ZB24578 | 1W SURGE PROTECTION MODULE FOR SOUNDERS OUTPUT | 195,00 |
| ▼▼ NEW MA05/D/2 | 4W SURGE PROTECTION MODULE 220V - UP TO 5A | 110,00 |
| MA10/D/2 | 4W SURGE PROTECTION MODULE 220V - UP TO 10A | 125,00 |
| MA15/D/2/SI | 4W SURGE PROTECTION MODULE 220V - UP TO 15A | 155,00 |

